


Pipe Plugs to ANSI B16.11

Threaded to ANSI B2.1

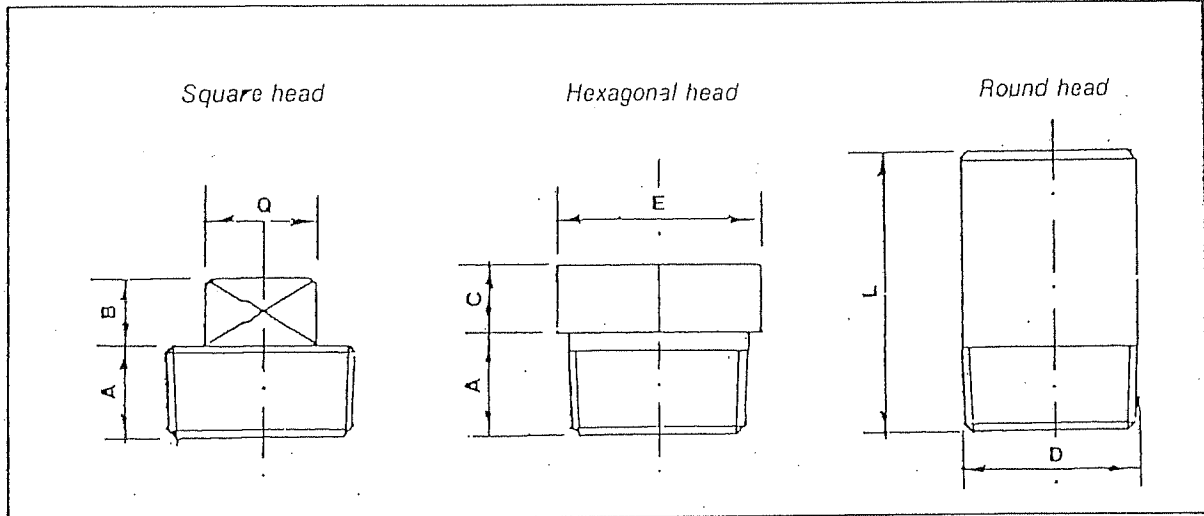

ND	A min.	B min.	C min.	D nominal	E nominal	L min.	Q
1/8"	9.5	6	6	10	11.0	35	7.0
1/4"	11.0	6	6	13	16.0	41	9.5
3/8"	12.5	8	8	17	17.5	41	11.0
1/2"	14.5	10	8	21	22.0	44	14.5
3/4"	16.0	11	10	27	27.0	44	16.0
1"	19.0	13	10	33	35.0	51	20.5
1 1/4"	20.5	14	14	43	44.5	51	24.0
1 1/2"	20.5	16	16	48	51.0	51	28.5
2"	22.0	17	17	60	63.5	64	33.5
2 1/2"	27.0	19	19	73	76.0	70	38.0
3"	28.5	21	21	89	89.0	70	43.0
4"	32.0	25	25	114	117.5	76	63.5

ND	Weight Kilos/Each		
	Square	Hexagonal	Round
1/8"	0.015	0.015	0.025
1/4"	0.020	0.025	0.050
3/8"	0.035	0.045	0.075
1/2"	0.055	0.070	0.125
3/4"	0.090	0.125	0.200
1"	0.170	0.220	0.350
1 1/4"	0.290	0.410	0.555
1 1/2"	0.390	0.570	0.725
2"	0.600	0.900	1.420
2 1/2"	1.100	1.600	2.250
3"	1.700	2.500	3.400
4"	3.500	5.000	6.100

Plugs are not identified by Pressure Class. They may be used for ratings up to Pressure Class 6000.
Dimensions in mm