


Reducer F/M

Threaded to ANSI B2.1

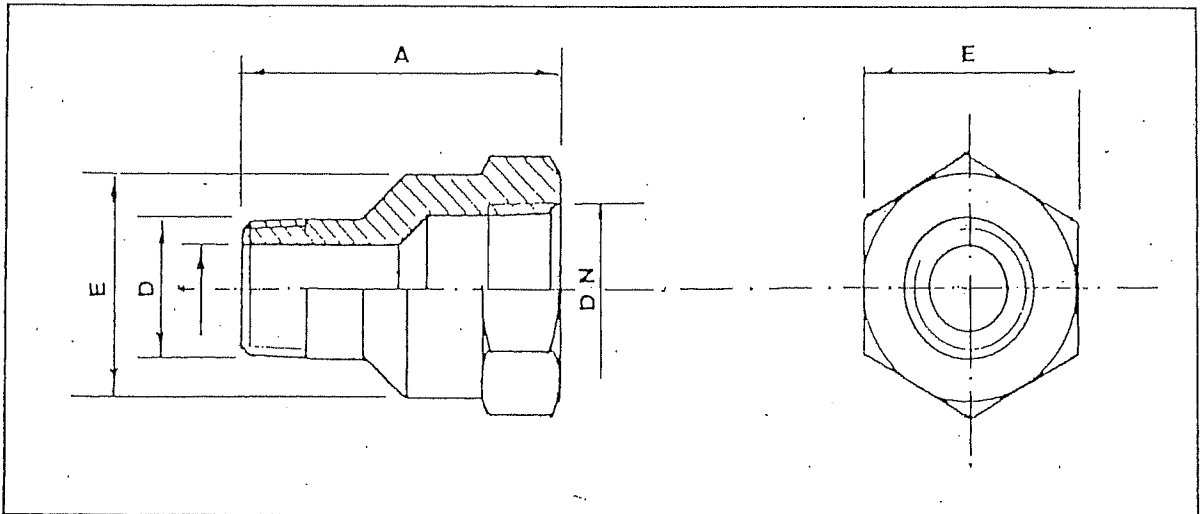

ND x REDUC	A	D	E	f		Weight Kilos/Each
				sch. 80	sch. 160	
3/8" x 1/4"	39	14.0	22	7.6	6.3	0.060
1/2" x 3/8"	47	17.4	29	10.7	9.1	0.125
1/2" x 1/4"	47	14.0	29	7.6	6.3	0.120
3/4" x 1/2"	52	21.6	35	13.8	11.8	0.195
3/4" x 3/8"	52	17.4	35	10.7	9.1	0.185
3/4" x 1/4"	52	14.0	35	7.6	6.3	0.180
1" x 3/4"	62	27.0	45	18.8	15.5	0.390
1" x 1/2"	62	21.6	45	13.8	11.8	0.360
1" x 3/8"	62	17.4	45	10.7	9.1	0.350
1" x 1/4"	62	14.0	45	7.6	6.3	0.345
1 1/4" x 1"	68	33.7	55	24.3	20.7	0.550
1 1/2" x 1"	74	33.7	64	24.3	20.7	0.810
1 1/2" x 3/4"	74	27.0	64	18.8	15.5	0.800
1 1/2" x 1/2"	74	21.6	64	13.8	11.8	0.790
2" x 1 1/2"	80	48.6	76	38.1	34.0	1.150
2" x 1 1/4"	80	42.5	76	32.5	29.5	1.130
2" x 1"	80	33.7	76	24.3	20.7	1.100
2 1/2" x 2"	96	60.6	92	49.2	42.8	2.150
2 1/2" x 1 1/2"	96	48.6	92	38.1	34.0	2.050
3" x 2 1/2"	110	73.0	108	59.0	54.0	3.000
3" x 2"	110	60.6	108	49.2	42.8	2.950
4" x 3"	130	89.0	140	73.7	66.6	5.800
4" x 2 1/2"	130	73.0	140	59.0	54.0	5.650
4" x 2"	130	60.6	140	49.2	42.8	5.600

Dimensions in mm

Note: Not standardised: Sizes according to manufacturers standard.

In standard production, bore f refers to sch. 80