

bevels according to DIN 2559

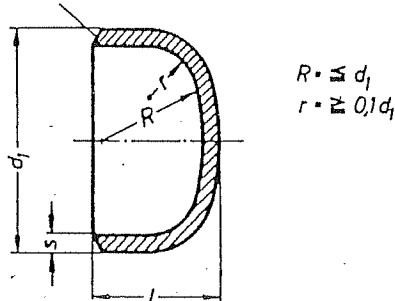


Table 1 : for pipes according to ASA specifications

d1	S SERIES			length l
	1 (1)	2 (2)	3	
21,3	2	2,9		32
26,9	2,3	2,9		32
33,7	2,6	3,6		38
42,4	2,6	3,6		38
48,3	2,6	3,6		38
60,3	2,9	4	5,6	38
76,1	2,9	5,6	7,1	38
88,9	3,2	5,6	8	50
114,3	3,6	6,3	8,8	64
139,7	4	7,1	10	76
168,3	4,5	7,1	11	90
219,1	5,9	8	12,5	100
273	6,3	10	12,5	127

TABLE 2 : for pipes according to DIN 2448 - 2548 only

d1	s	length l	d1	s	length l
30	2,6	38	108	3,6	64
38	2,6	38	133	4	76
44,5	2,6	38	159	4,5	90
57	2,9	38	267	6,3	127

Sizes for which no wall thickness S is mentioned, only on special request.

(1) Wall thicknesses on bevelled end under series 1, are in accordance with the normal WT to DIN 2448.

(2) Wall thicknesses under series 2 are in accordance with ASA B16.9 - Std.